

0.6 m | 2 ft Standard Performance Parabolic Reflector Antenna, Dual-polarized, 3.3-4.2GHz



SPD2-3.5

The SP Standard Performance 3.5GHz Series by RadioWaves offers a cost effective, dual polarized, 2ft parabolic antenna engineered to deliver reliable radio links with a stable 24.6 dBi gain from 3.3 to 4.2 GHz. Designed for CBRS, C-band, private LTE, and world-wide CBRS applications, RadioWaves field-proven pre-assembled SP antennas and robust pole-mounts ensure “set and forget” installation with minimal post-installation maintenance. If it’s rugged, it must be RadioWaves!

Features and Benefits

- Gain of up to 24.6 dBi with low VSWR and high port isolation across the entire 3.3-4.2 GHz band
- One 2 x2 MIMO antenna that covers CBRS, C-band, and world-wide 5G applications
- Fully powder-coated with rugged hardware built to survive the elements
- Optional Accessories:
 - Conical radome to reduce wind loading
 - Side-strut kits to improve wind survival and operability
- Rugged Dual N-type Connectors for horizontal and vertical polarization
- Reduced interference with 38 dB minimum front to back and suppressed side lobes
- Fully Pre-assembled at the Factory – Simplifies installation and guarantees “factory-tested” quality

SPECIFICATIONS

General

Antenna Type	Standard Performance Parabolic Reflector Antenna
Size, nominal	2 ft 0.6 m
Polarization	Dual

Standard RF Connector Type	N-Female
Standard RF Connector Suffix	NS (append suffix to model number)

Electrical

Operating Frequency Band	3.3 - 4.2 GHz
Half Power Beamwidth, Horizontal	10 degrees
Half Power Beamwidth, Vertical	10 degrees
Cross-Polarization Discrimination	28 dB
Front to Back Ratio (F/B)	32 dB

Gain, Low Frequency	23.8 dBi
Gain, Mid Frequency	24.6 dBi
Gain, High Frequency	25 dBi
VSWR	1.5:1
Return Loss	-14 dB

Mechanical

Fine Azimuth Adjustment	+/- 10 degrees	
Fine Elevation Adjustment	+/- 30 degrees	
Mounting Pipe Diameter, Min	2 inch 5.08 cm	
Mounting Pipe Diameter, Max	4.5 inch 11.4 cm	
Net Weight	22 lbs 9.9 kg	26 lbs 11.7 Kg with RD radome
Wind Velocity Operational	90 mph 145 km/h	
Wind Velocity Survival Rating	125 mph 201 km/h	

Mechanical Configuration	SP2	
Axial Force (FA)	222 lbs 988 N	122 lbs 543 Nm with RD radome
Side Force (FS)	14 lbs 62 N	24 lbs 107 Nm with RD radome
Twisting Moment (MT)	225 ft-lbs 305 Nm	194 lbs 263 Nm with RD radome
Operating Temperature Range	-40 to +60 C	
Max Pressure, PSIG, (if waveguide interface)	na	

Regulatory Compliance

FCC	undeclared
Industry Canada Compliance	undeclared

ETSI	undeclared
RoHS-compliant	Yes


Shipping Information

Package Type	Cardboard
Gross Weight	25 lbs 11.3 kg

Dimensions, L x W x H	28 x 8 x 28in 71 x 20 x 71 cm
Shipping Volume	3.63 cu ft 0.1 cu m

*Additional OEM interfaces and adapters may be available. Contact RadioWaves for a complete and current list of available adapters.

TECHNICAL DRAWINGS

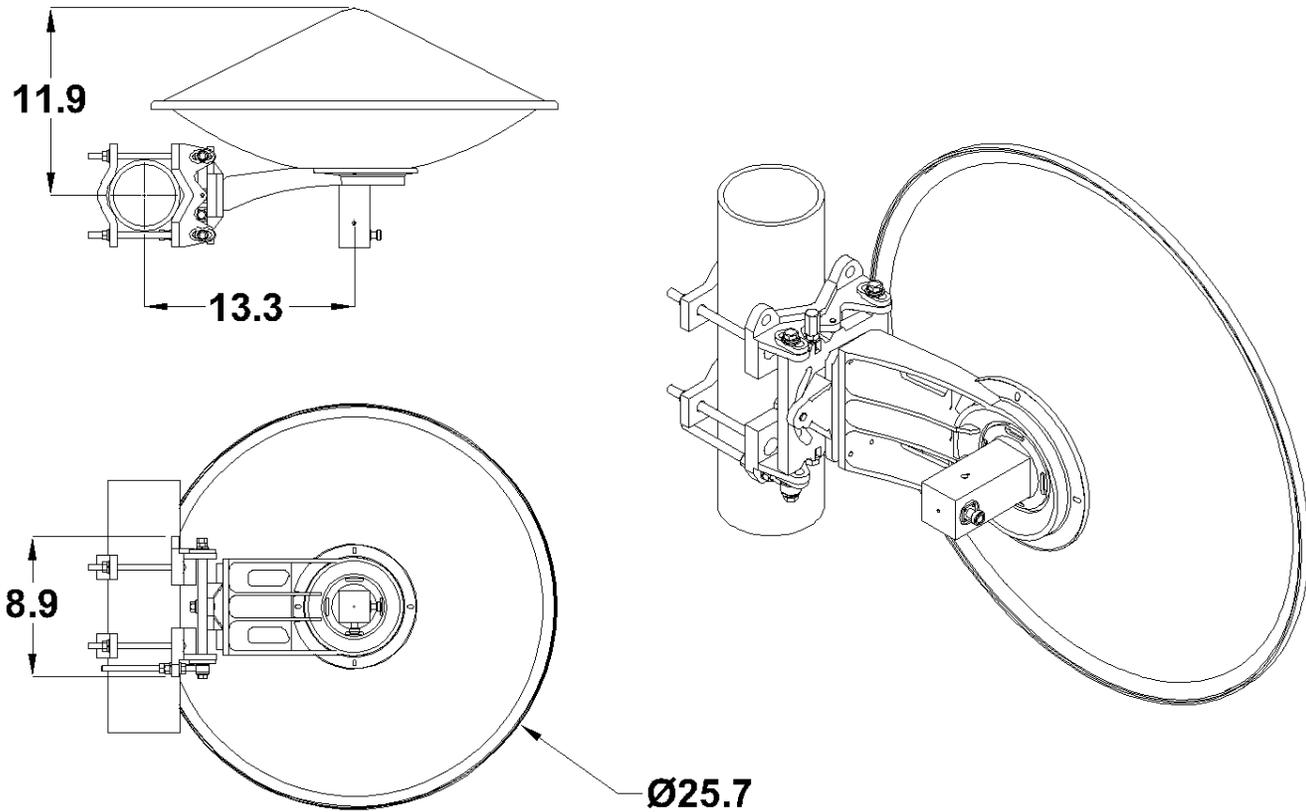

SP2